

**Model:** BVG5TP60LW940L22-

### Type

Linear waterproof ceiling light equipped with high efficiency Biovitae SMD LEDs, equipped with a connection system for cascade connection.

### Characteristics:

Ra>90, 50000 hours, 4000K

Flicker Free: for greater visual comfort, better definition of details and reduction of visual stress. Risk Group 0

### Materials:

Polycarbonate body, high transmittance opal polycarbonate screen, equipped with internal optical shapes for the orientation and uniformity of light flux distribution.


Equipped with AISI 316 stainless steel closures and brackets for ceiling anchoring or suspension.



### Technical Data :

Rated Power	20 W	Beam Angle	110°x136°	Dimmability	On request	Rated Voltage	220-240 Vac
Connection	Terminals	Degrees of protection Optical vane	65	Degrees of protection Component vane	65	Flux	2200 lm
Environmental Conditions	Ta -25 ÷ +35°C	PF	>0,90	Tc	4000 K	CRI	>90
Risk Group	RG0	Warranty	5 Years	Vita Utile	L80/B20>50,000	UGR	<21

### Dimensional Characteristics :





L	600 mm
L1	83 mm
H	70 mm

### Electrical characteristics:

Rated power	20 W
Input Voltage	220 -240 Vac
Frequency	50-60 Hz
Dimmability	On request
Power Factor	>0,5
Wheighted power	20 kWh/1000h
ON/OFF Cycles	100000
Operating Environmental Conditions	-25°C / +35°C

### Lighting and photometric features :

Beam Angle	110° x 138°
Flux	2200 lm
Axis Candle	600 cd
Nominal CCT color temperature	4000 K
Tone of light	Natural Light
Color Rendering Index	>90
Lifetime	50.000 h
Rated Lumen Maintenance Life	L80B20
Trigger time	<0,2 s
Warm-up time up to 60% of full output	Instant Full Light

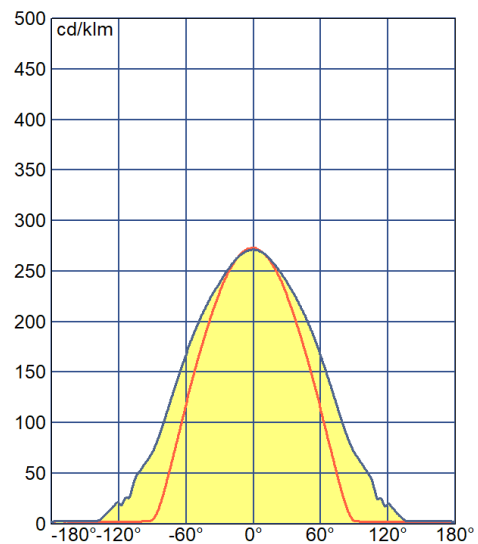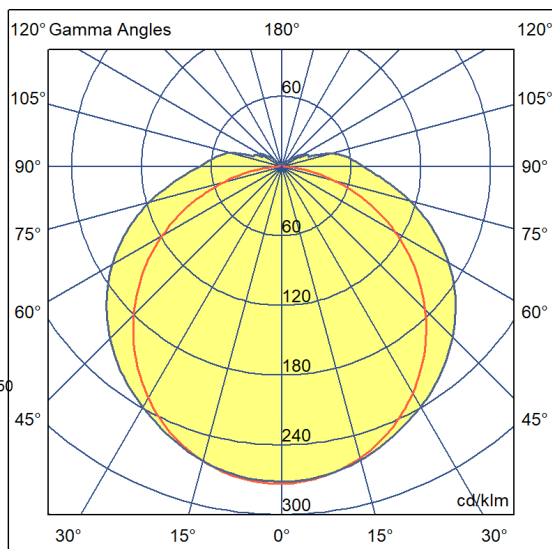

### Warranty:

Type of Warranty	5 years
------------------	---------







### EU Directive and Standards:

2009/125/EC, 1194/2012, 2015/1428, 2010/30/EU	CEI EN 61000-3-3:2014
874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU	CEI EN 61547:2010
2014/35/EU, 2015/863	CEI EN 62031:2009
CEI EN 55015:2020	CEI EN 62031/A1/A2:2015
CEI EN 60598-1:2015	CEI EN 62471:2010
CEI EN 60598-1/A1:2019	IEC TR 62471-2:2009
CEI EN 60598-2-2:2012	CEI EN 62493:2015
CEI EN 61000-3-2:2019	CEI 34-141:2014

### Logistics data :

Item net weight	
Barcode single item	
Number of pieces multiple pack	
Barcode multiple pack	

### Colorimetric Specifications :

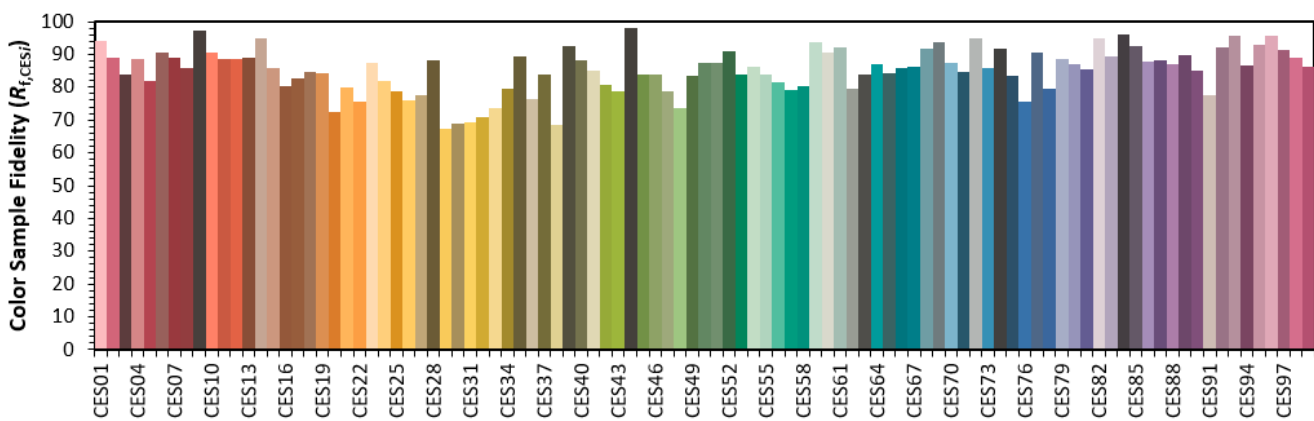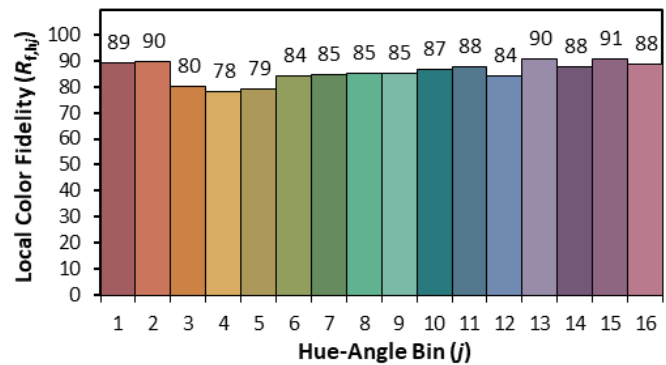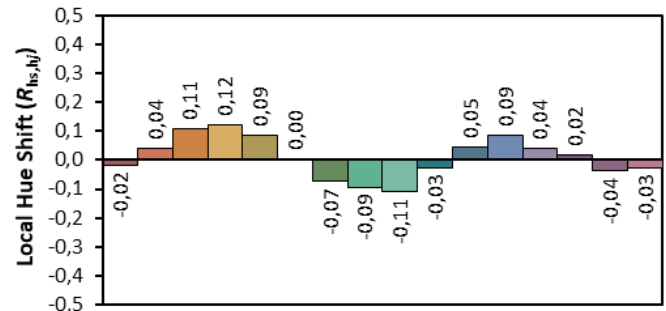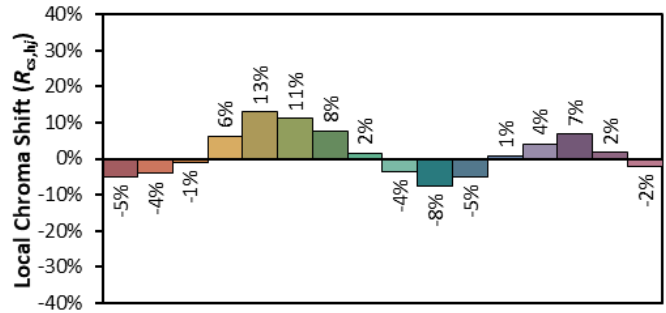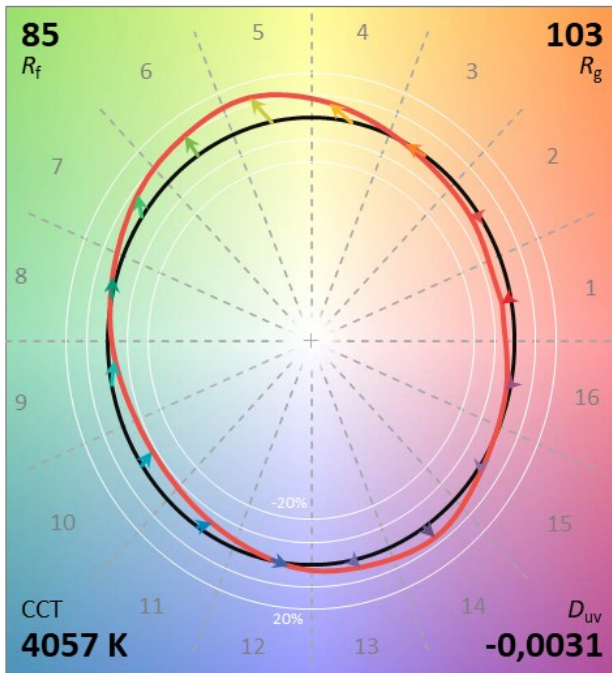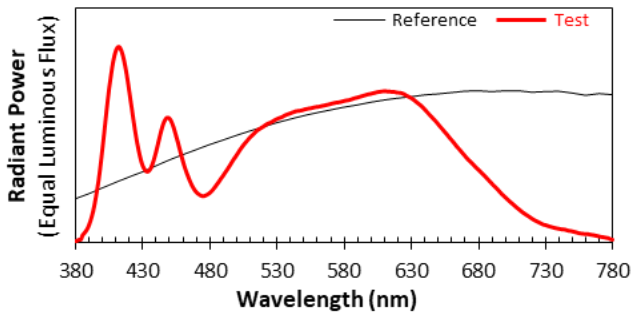


**Notes:** This is a recommended method for displaying ANSI/IES TM-30-18 information.

$x$  0,3759  
 $y$  0,3674  
 $u'$  0,2259  
 $v'$  0,4967


CIE 13.3-1995  
(CRI)

$R_a$  90


$R_g$  61

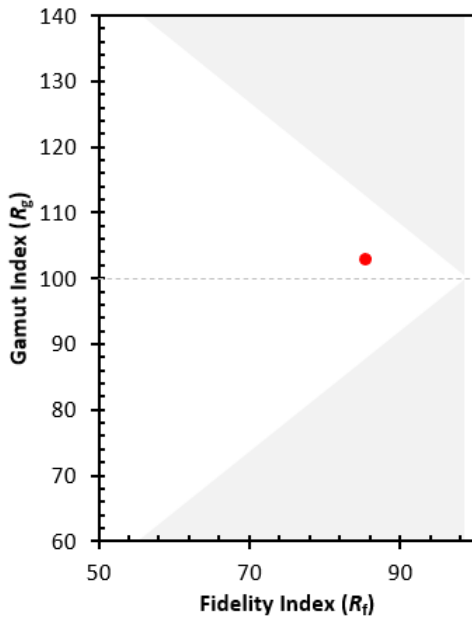

**Gamut Index vs. Fidelity Index**  
 The range in possible  $R_g$  values increases as  $R_f$  decreases. The gray shaded area indicates the approximate region of combinations that are not possible for nominally white light sources.

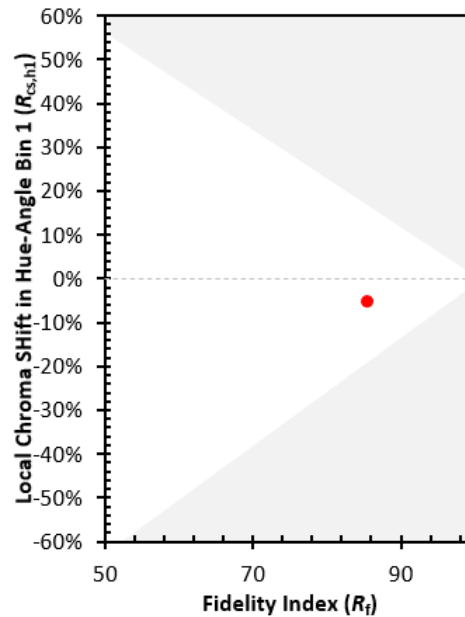

**Local Chroma Shift in Hue-Angle Bin 1 vs. Fidelity Index**  
 The range in possible  $R_{cs,h1}$  values increases as  $R_f$  decreases. The gray shaded area indicates the approximate region of combinations that are not possible for nominally white light sources.

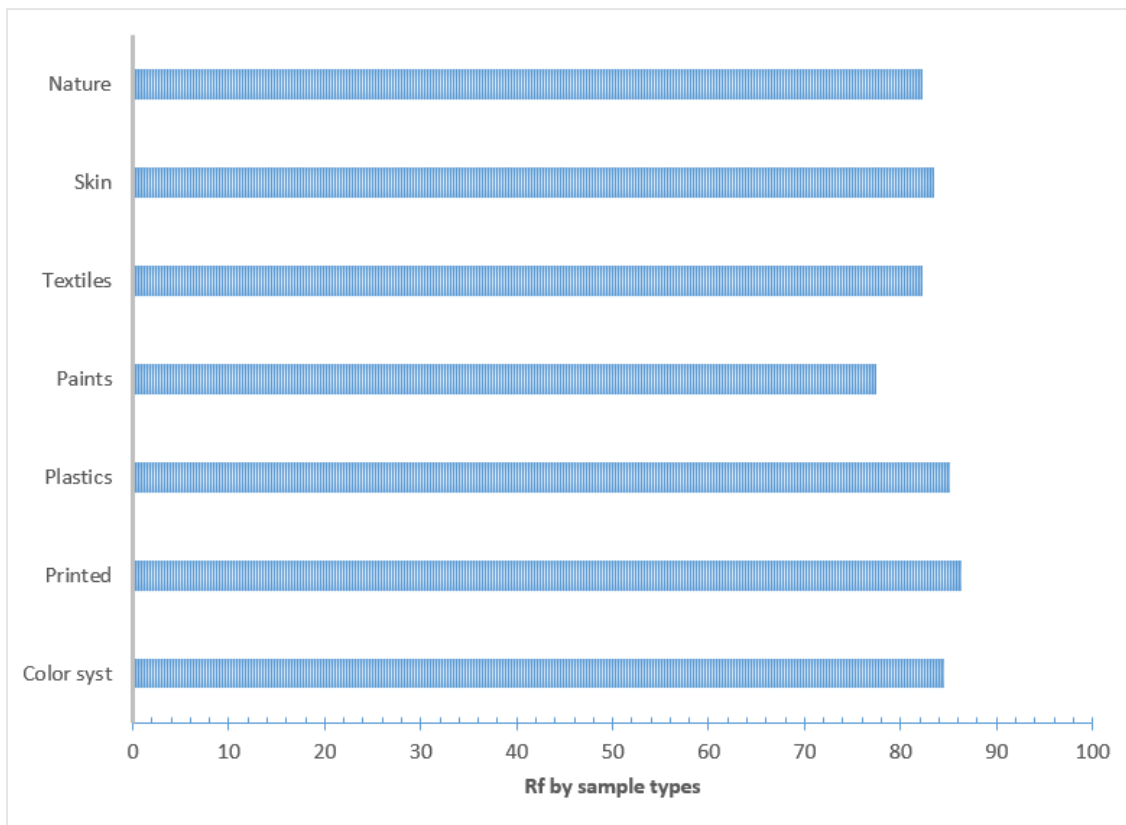

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.